

In-flight vibratory analysis of aircraft structures, carried out by means of impulse excitation applied through thrusters, offers positive advantages compared with other processes :

- Reduced testing time
- Small size
- Simple application

The PL 81 thruster is a new model of simple design and of reliable and reproducible operation, allowing the synchronization of several thrusters controlled simultaneously.

It is composed of a rectangular bar made of a block of hollowed-out aluminum, equipped at one end with the firing relay (black powder plus firing tube), and at the other end with the ejection nozzle for the gases, mounted perpendicular to the top face, including its security device.

The principal charge consists of propergol strips whose length and thickness are calculated to suit the desired force and combustion time.


The thrust time curve is similar to a "square wave" impulse.

The PL 81 thruster meets the standard operating specifications and the particular ambient conditions for in-flight tests (temperature, vibration, shock, pressure, etc...).

TECHNICAL CHARACTERISTICS

| | PL 81 I | PL 81 II |
|--|---|---|
| Conventional thrust | 600 N | 200 N |
| Charge | 0.5 g black powder 8 g propergol | 0.25 black powder 3 g propergol |
| Conventional combustion time, depending on the thickness of the propergol strips | Type D Type C Type B Type A | 12 ms 18 ms 22 ms 26 ms |
| Dispersion over firing period | ± 4 ms | |
| Frequency range depending on the thickness of the propergol strips | Type D Type C Type B Type A | 30 - 70 Hz 20 - 50 Hz 10 - 40 Hz 5 - 30 Hz |
| Ohmic resistance | 2 ± 0,4 Ohm | |
| Minimum operating intensity | 0.35 A | |
| Recommended ignition intensity | > 2.5 A | |
| Safety and measurement intensity | < 0.05 A | |
| Weight | 200 grams | 125 grams |
| Overall dimensions (mm) (delivered with cable 50 cm) | 137 x 23 x 25 | 78 x 23 x 25 |
| Fixing points | 4 holes M4 diameter, hole spacings 114 mm x 20 mm | 4 holes M4 diameter, hole spacings 60 x 20 mm |
| Operating and storage temperature | From - 40° C to + 70° C | |
| Flash point | 140° C | |

**Thrust curve at 20°C of a thruster
model PL 81 I 600 N**

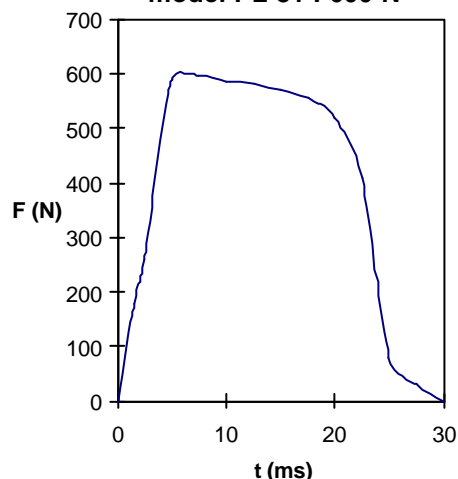

Enclos d'Esquerre - 31380 VILLARIES - FRANCE

Phone Nb : (+ 33) 5 61 84 36 98 - Fax Nb: (+ 33) 5 61 84 17 91

E-mail: prodera@prodera.com - <http://www.prodera.com>



PRODERA

The manufacturer reserves the right to change technical or mechanical specifications of its products at any time.

Data sheet N° 94/PL2001